

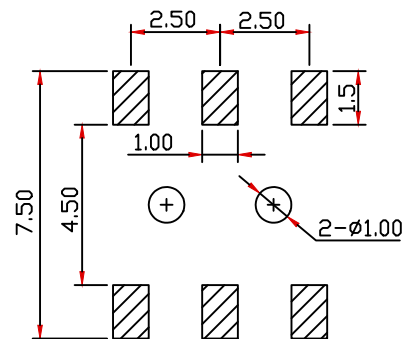


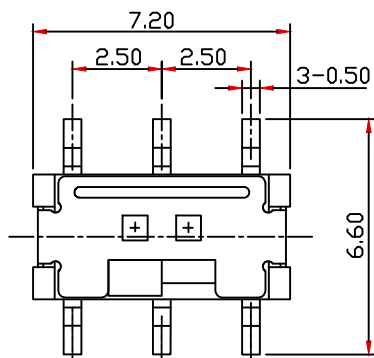

P.C.B LAYOUT

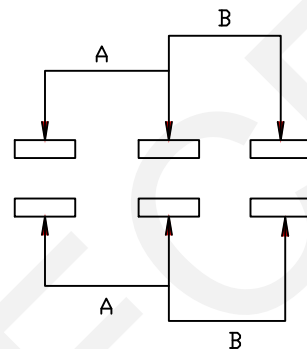

CIRCUIT

ELECTRICAL

Rating:0.3A 30V DC

Function:2P2T

Timing:Non-Shorting

Contact Resistance:70mΩ Max.

Insulation Resistance:100MΩ Min.at 500V DC

Dielectric Strength: AC 500V For 1Min

Operating Temper:-20°C~75°C

Operating Force:170±50gf



Life Test:10000 Cycles

PACKING:1000PCS/Reel

Order Information:

RHTGYSS-2247N

DPDT

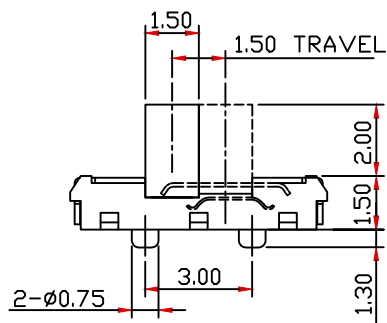

6	STRETCH PIECE	SUS	Natural	1
5	TERMINAL	C2680	Ag PLATED	6
4	CONTACT	C5210	Ag PLATED	1
3	BOTTOM	LCP	Black	1
2	COVER	SUS	Natural	1
1	STEM	PA6T	Black	1
NO.	PARTS	MATERIAL	FINISHING&COLOR	Q'TY



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mini Slide Switch,7.2x3.5x1.5mm,
DPDT SMD Horizontal

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYSS-2247N