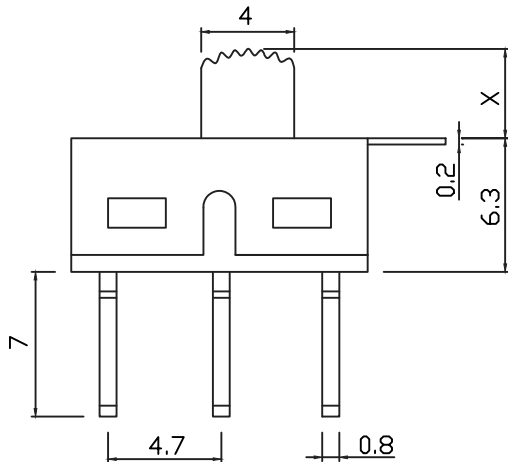
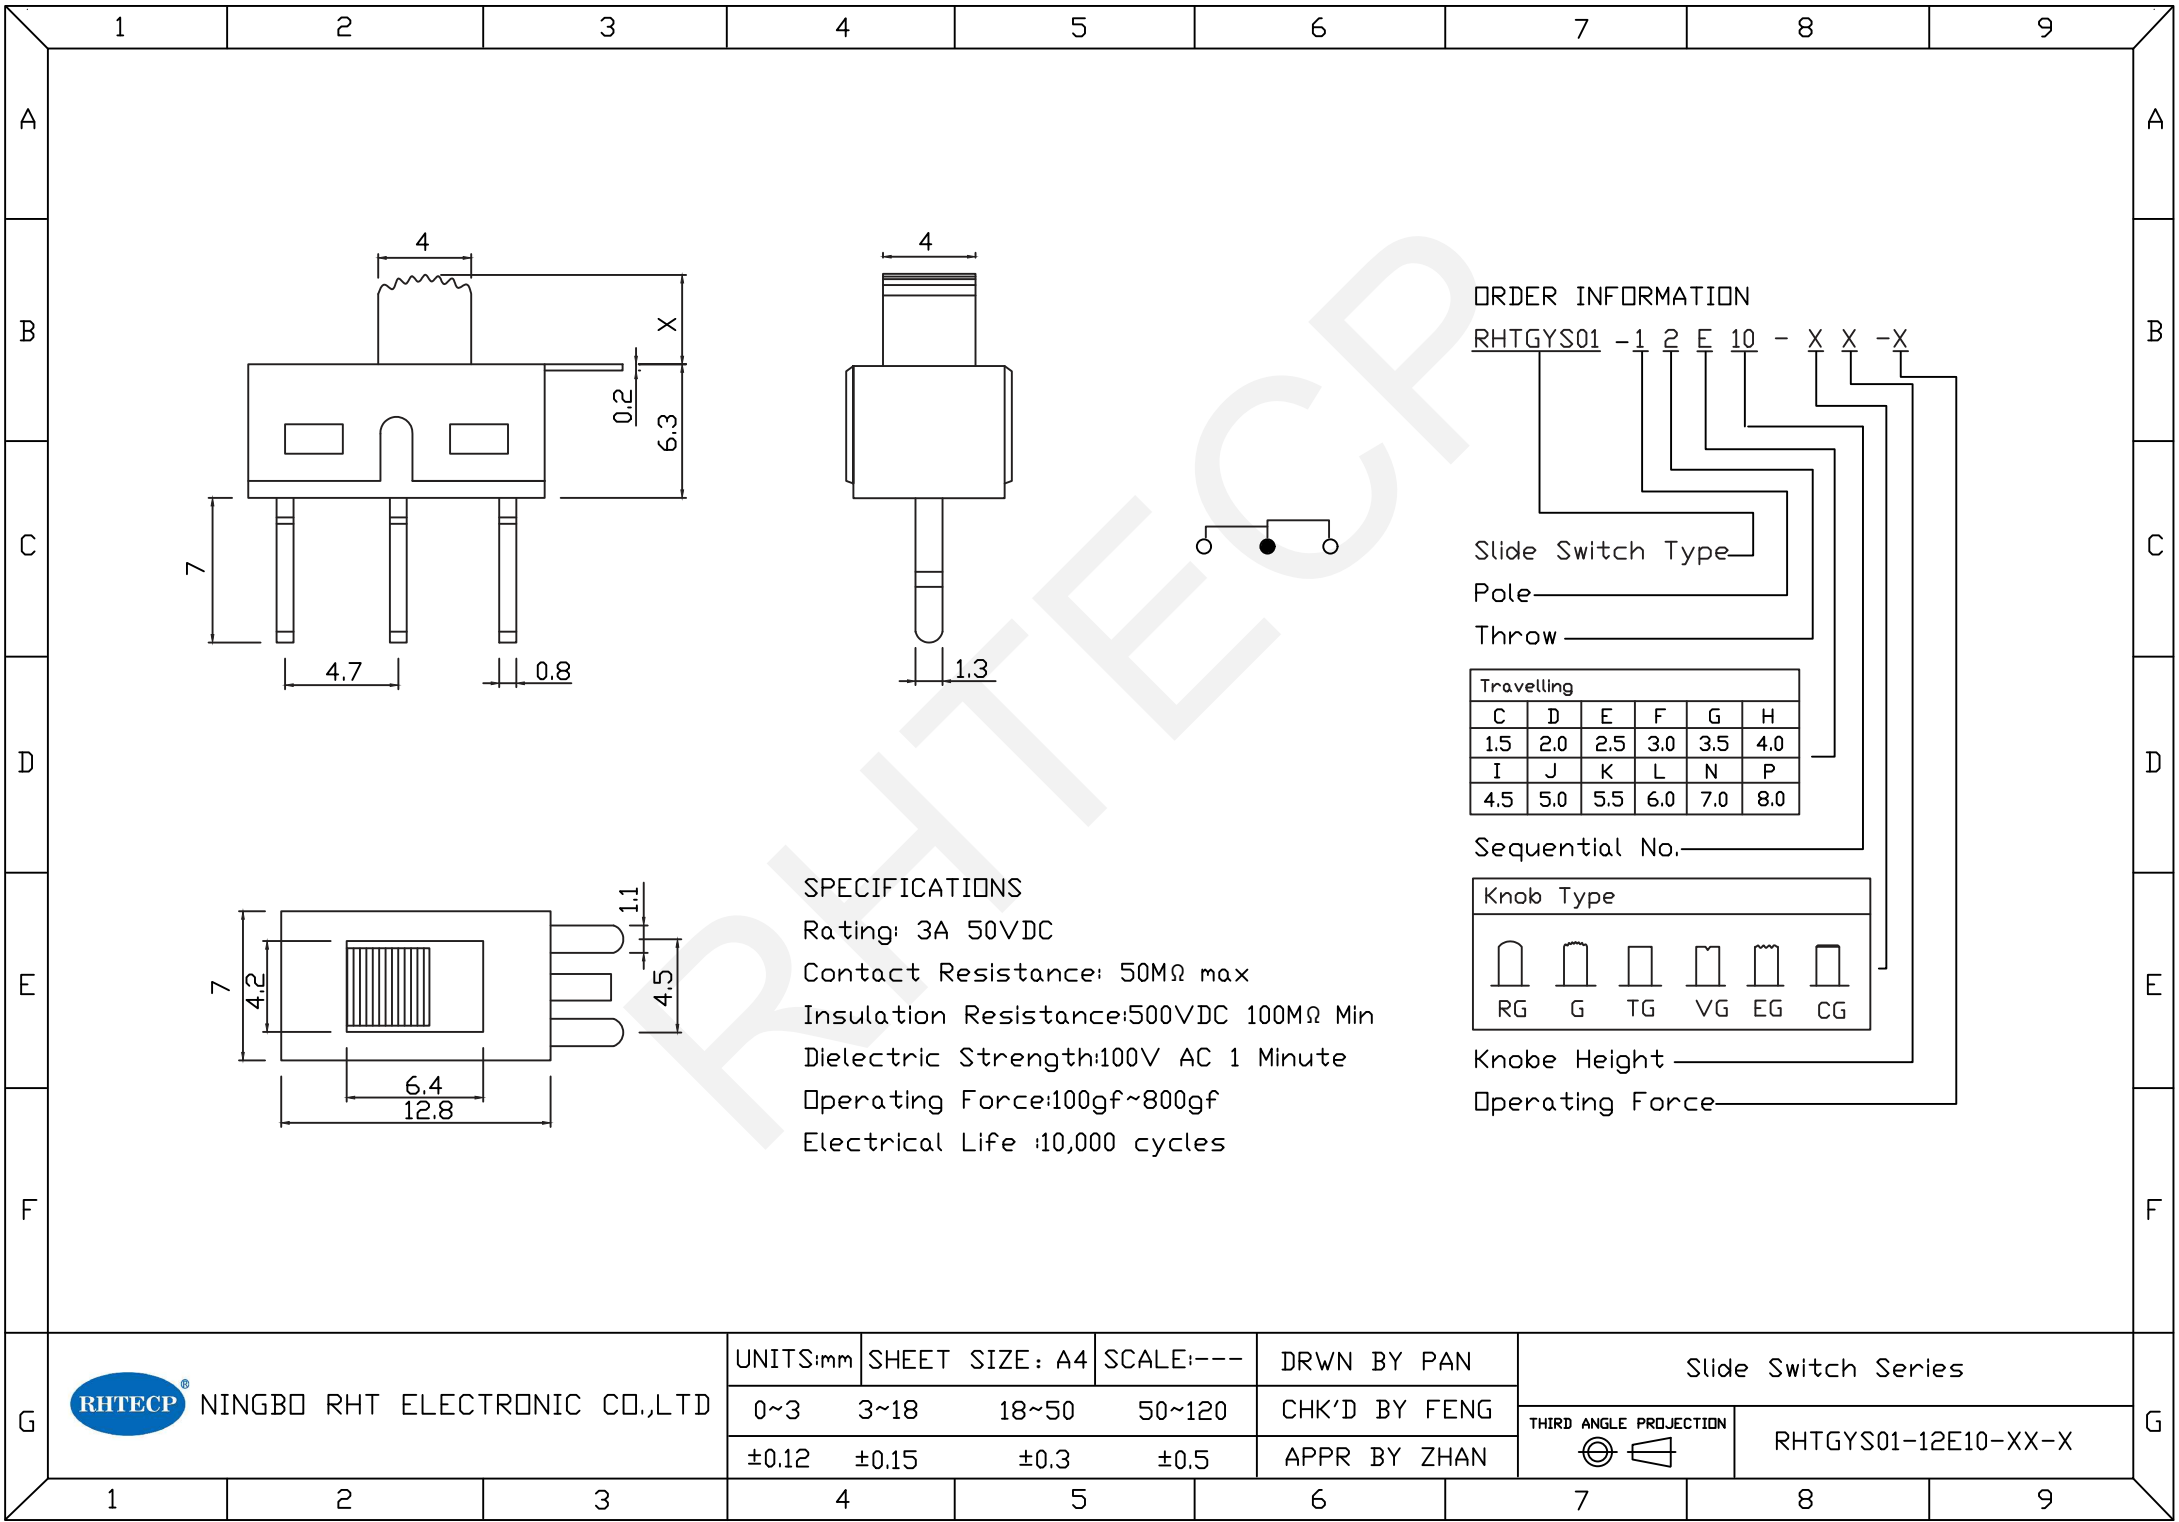


ORDER INFORMATION

RHTGYS01 -1 2 E 10 - X X -X

Slide Switch Type


Pole

Throw

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No.

Knob Type



Knobe Height

Operating Force

SPECIFICATIONS

Rating: 3A 50VDC




Contact Resistance: 50MΩ max

Insulation Resistance: 500VDC 100MΩ Min


Dielectric Strength: 100V AC 1 Minute

Operating Force: 100gf~800gf

Electrical Life :10,000 cycles

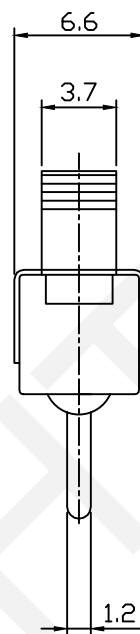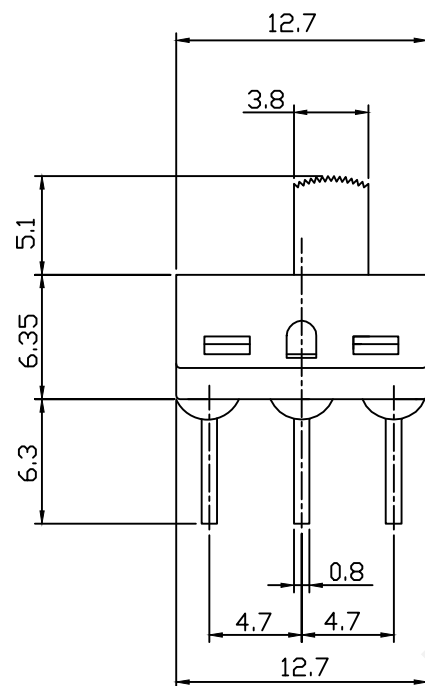

Circuit Diagram



Electric:
 Rating: 2A 250V AC; 5A 125V AC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: DC500V 1000MΩ Min
 Dielectric strength: 1500V AC, 1minute
 Electrical Life: 10000 Cycles

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Miniature Slide Switch

THIRD ANGLE PROJECTION



RHTGYS01-12E10A-G5.1