

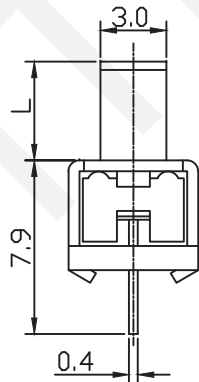
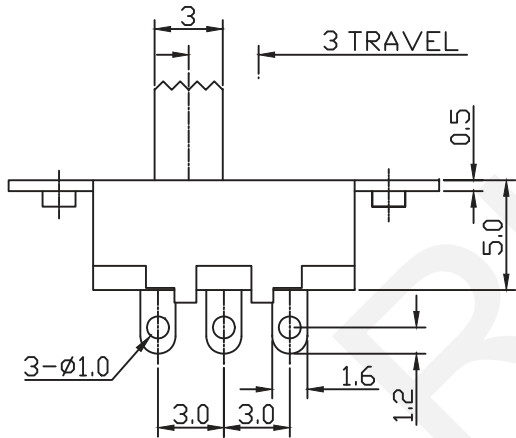


	1	2	3	4	5	6	7	8	9	
A										
B										
C										
D										
E										
F										
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Slide Switch Series		
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTGYS02-12F16-XX-X
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		
	1	2	3	4	5	6	7	8	9	

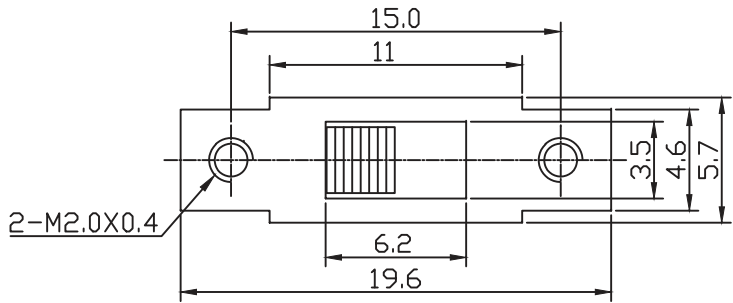

SPECIFICATIONS
Rating: 0.5A 50VDC
Contact Resistance: 50MΩ max
Insulation Resistance: 500VDC 100MΩ Min
Dielectric Strength: 100V AC 1 Minute
Operating Force: 100gf~800gf
Electrical Life :10,000 cycles

ORDER INFORMATION

RHTGYS02 - 1 2 F 16 - X X -X

Slide Switch Type _____

Pole _____

Throw _____

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Sequential No. _____

Knob Type					
					
RG	G	TG	VG	EG	CG

Knobe Height _____

Operating Force _____