



1 2 3 4 5 6 7 8 9


A

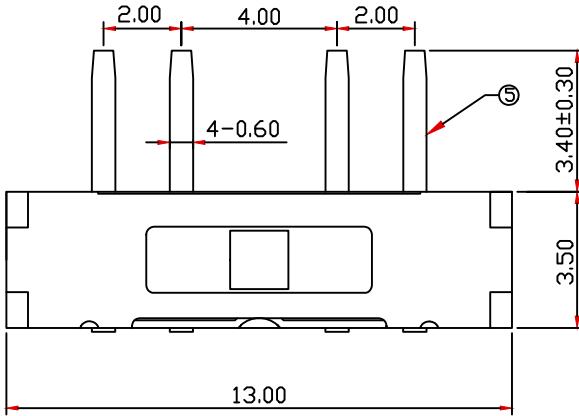


B




C

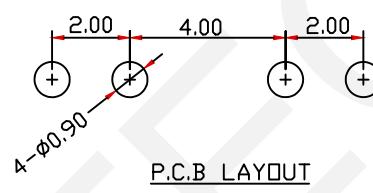

D

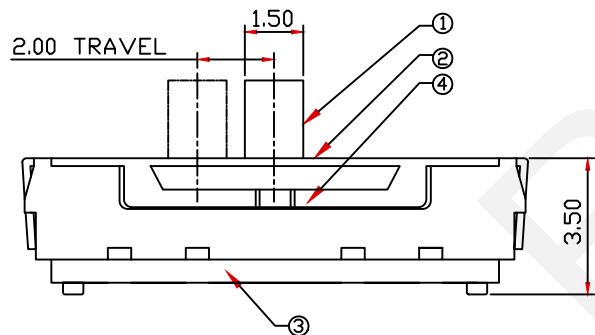

E



F

ELECTRICAL

Rating: 0.3A 30V DC

Function: 1P3T

Timing: Non-Shorting

Contact Resistance: 80mΩ Max.

Insulation Resistance: 100MΩ Min. at 500V DC

Dielectric Strength: AC 500V For 1Min

Operating Temp.: -20°C~80°C

Operating Force: 200±50gf

Life Test: 10000 Cycles

Order Information:

RHTGYSS-1360-X-B

1P3T

STEM Color:

B-Black

PACKING: B-BAG

NO.	TERMINAL A/B/C	C2680	Ag PLATED	8
4	CONTACT	C5210	Ag PLATED	2
3	BOTTOM	PA66	Black	1
2	COVER	SUS	Natural	1
1	STEM	PA66	Black	1
NO. PARTS	MATERIAL	FINISHING&COLOR	Q'TY	



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Mini Slide Switch, 13.0×3.5×3.5mm, 1P3T



RHTGYSS-1360

1 2 3 4 5 6 7 8 9

G

A

B

C

D

E

F

G