
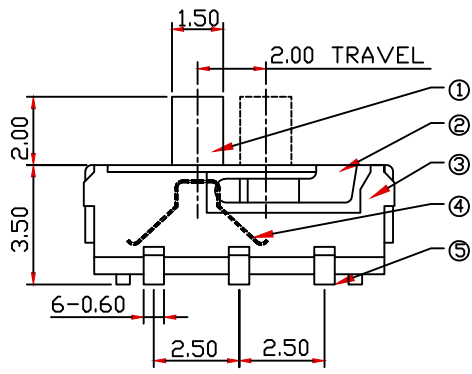



P.C.B LAYOUT

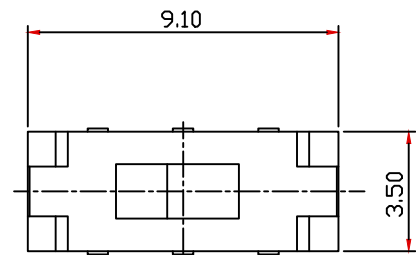

CIRCUIT

ELECTRICAL

Rating:0.3A 30V DC
Function:2P2T
Timing:Non-Shorting
Contact Resistance:70mΩ Max.
Insulation Resistance:100MΩ Min.at 500V DC
Dielectric Strength: AC 500V For 1Min
Operating Temper:-20°C~80°C
Operating Force:250±150gf
Life Test:10000 Cycles

Order Information:

RHTGYSS-2235A-B-R

DPDT
STEM Color:B-Black
PACKING:R-Tape&Reel

5	TERMINAL A/B/C	C2680	Ag PLATED	6
4	CONTACT	C5210	Ag PLATED	2
3	BOTTOM	PA46	Black	1
2	COVER	SUS	Natural	1
1	STEM	PA46	Black	1
NO.	PARTS	MATERIAL	FINISHING&COLOR	Q'TY