



Specifications  
 Wire:UL7×0.12×1.05,L=45mm  
 Pin: Iron,Fu" gold plated  
 Positive End:environmental protection Iron  
 Housing:ABS environmental protection material,0079  
 Bracket:ABS environmental protection material,0079

US JACK1 6P4C FU"





A VIEW




US JACK2 US JACK3  
 6P4C FU" 6P4C FU"


Wiring Method  
 US JACK1 6P4C FU"  
 Black Red Green Yellow

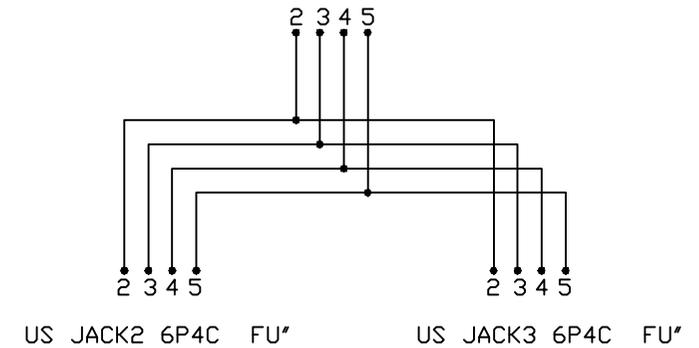

US JACK1



US JACK2




US JACK3

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Modular Jack Connector

RHTLY80-6P4C

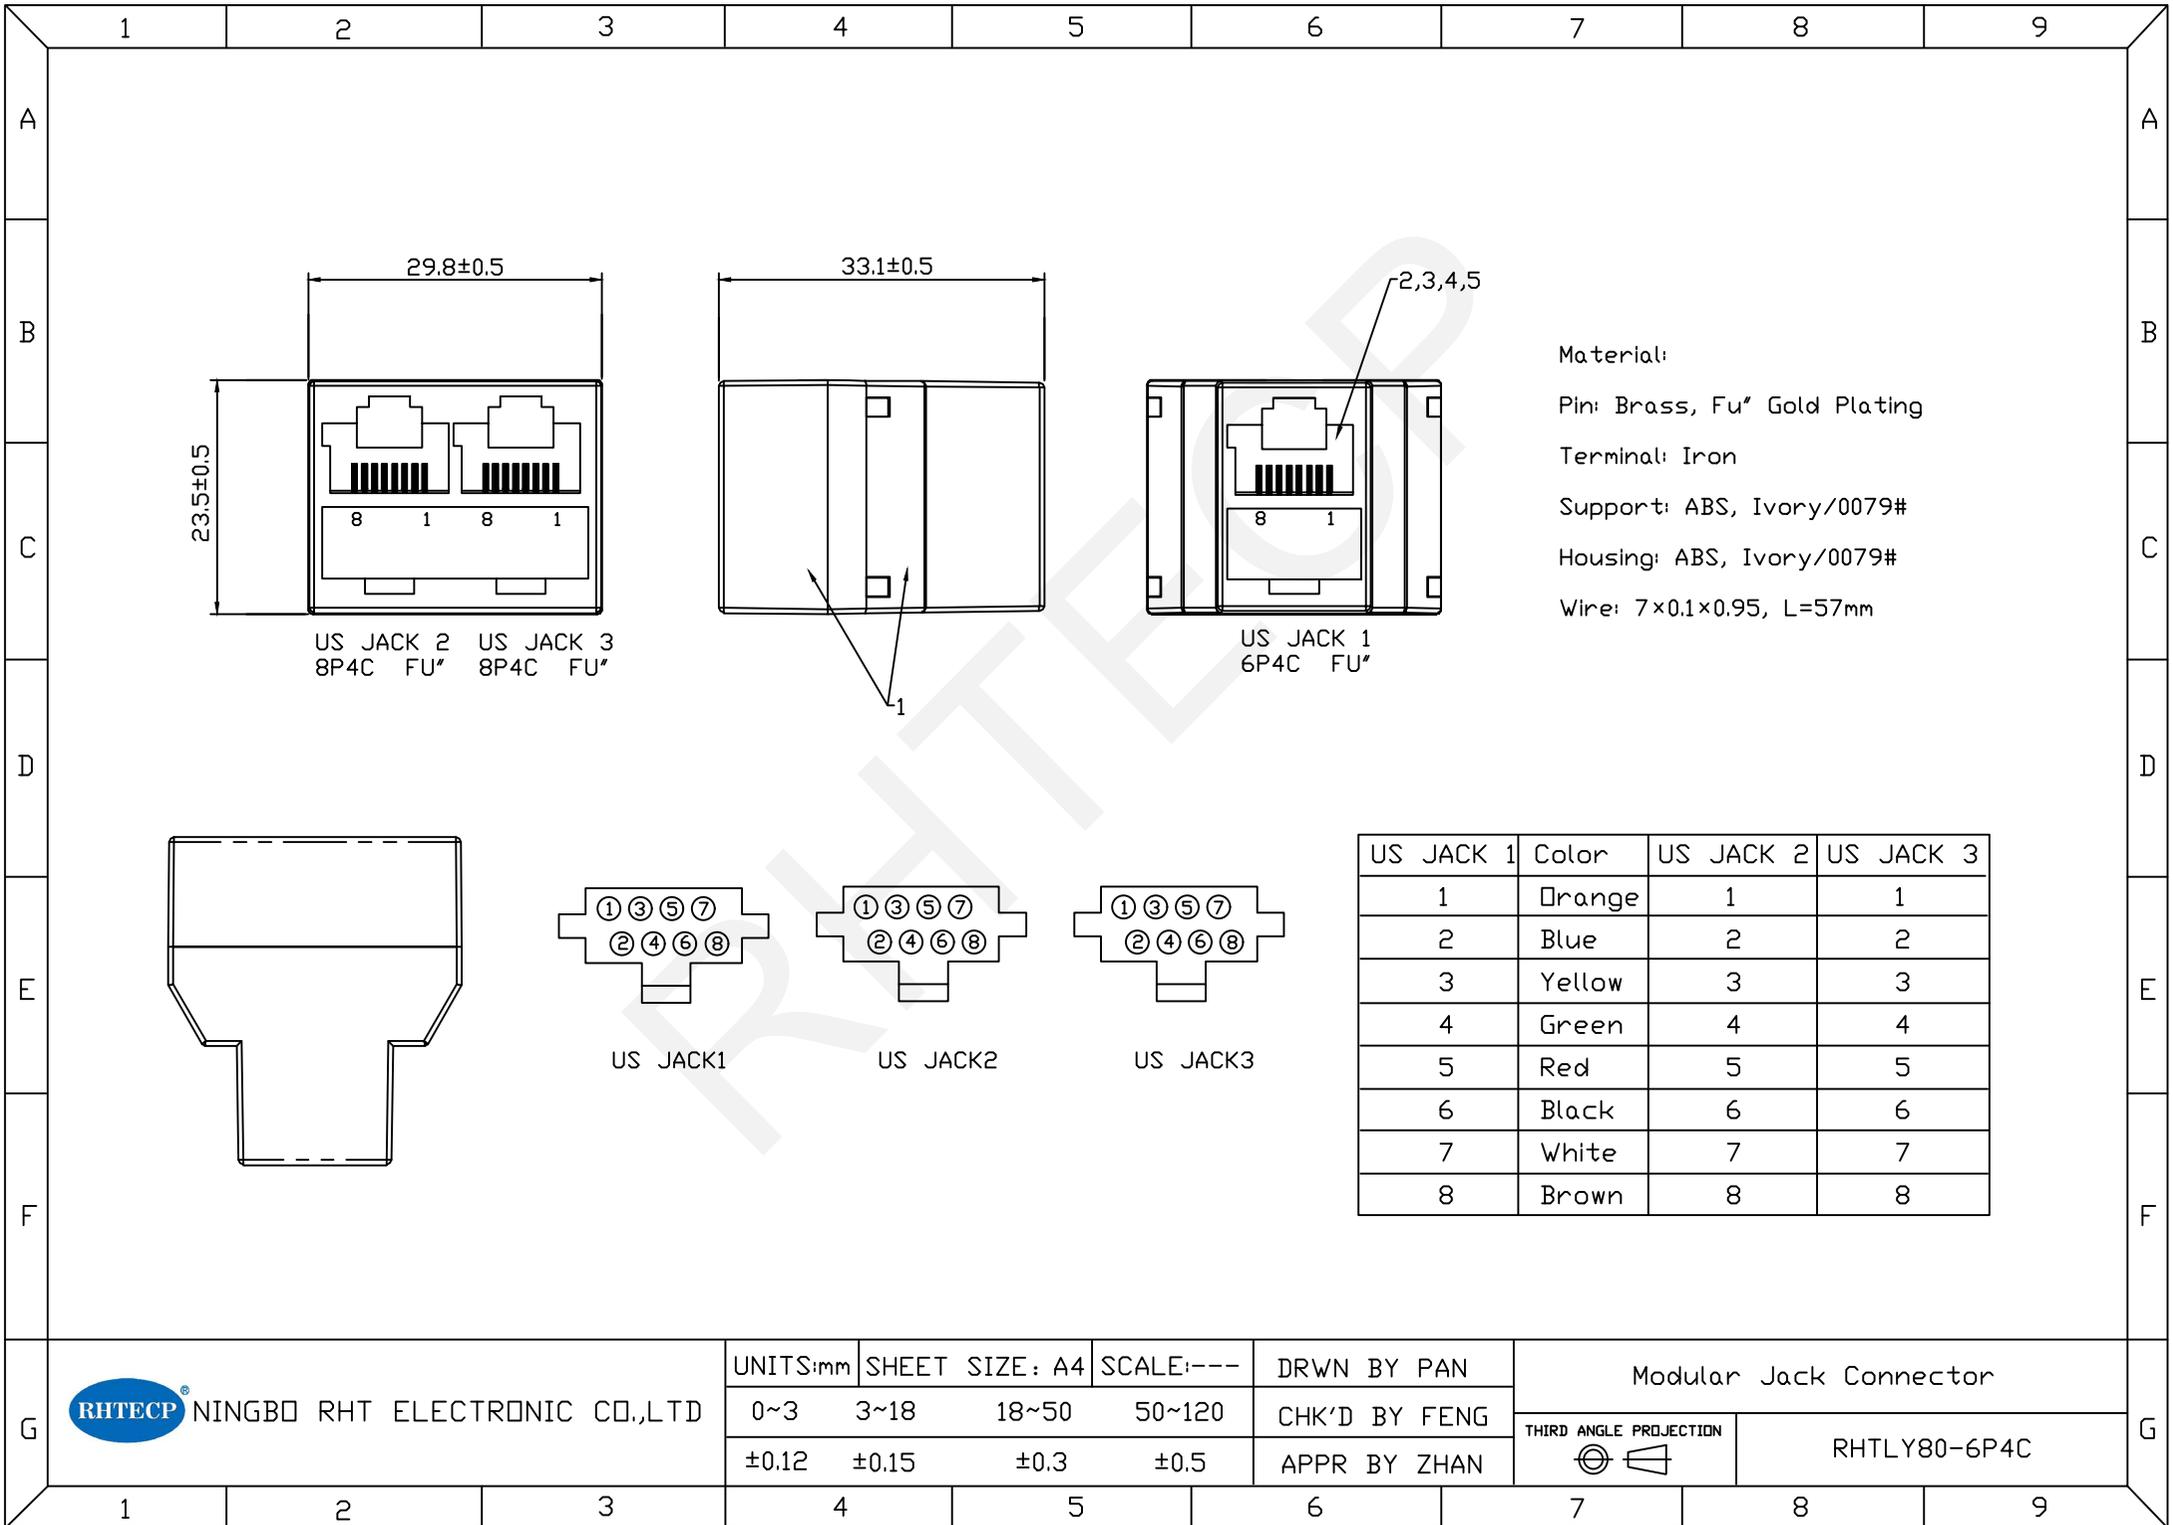

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Modular Jack Connector

RHTLY80-6P4C