


PCB LAYOUT  
Tol:±0.05mm

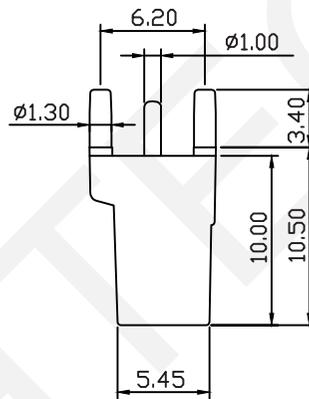

Material

Housing: PC

Flammability Rating: UL94V-2

Contacts: Phosphor Bronze, T=0.50mm

Plating: TIN Plating

Electrical Performance

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. at 500V DC

Dielectric Strength: 1000V Rms 50Hz, 1 Min.

Durability: 750 cycles Min.

Operation Temperature: -40°C~85°C

Order Information

Model Example: RHTLYM-05-XX

Contacts: \_\_\_\_\_

02-1 Pair IDC Connector

04-2 Pair IDC Connector


08-4 Pair IDC Connector

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD





UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Krone IDC Block PCB-PLUS

THIRD ANGLE PROJECTION



RHTLYM-05-08

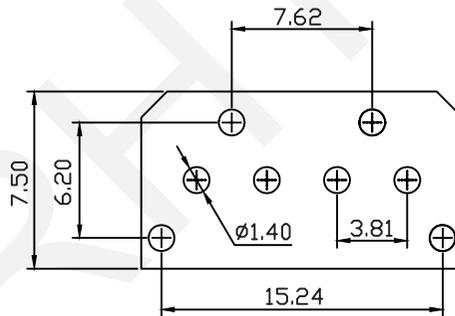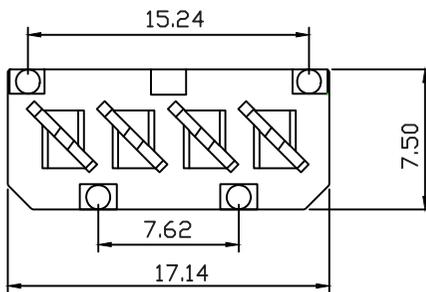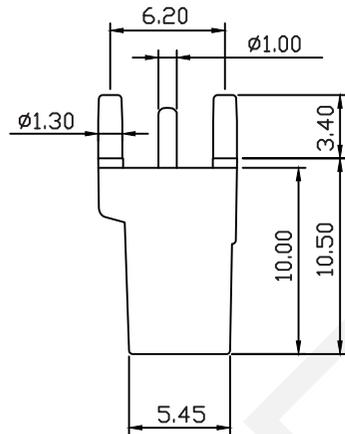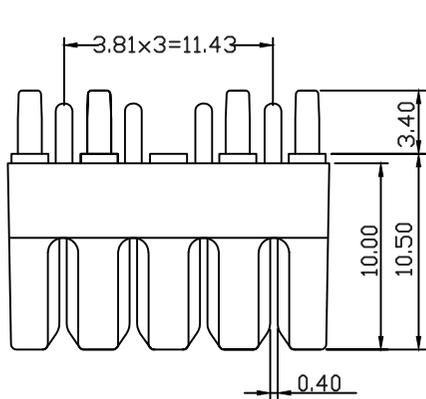

PCB LAYOUT  
Tol:±0.05mm

Material

Housing: PC

Flammability Rating: UL94V-2

Contacts: Phosphor Bronze, T=0.50mm

Plating: TIN Plating

Electrical Performance

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. at 500V DC

Dielectric Strength: 1000V Rms 50Hz, 1 Min.

Durability: 750 cycles Min.


Operation Temperature: -40°C~85°C

Order Information

Model Example: RHTLYM-05-XX





Contacts: \_\_\_\_\_  
02-1 Pair IDC Connector  
04-2 Pair IDC Connector  
08-4 Pair IDC Connector

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Krone IDC Block PCB-PLUS

RHTLYM-05-04

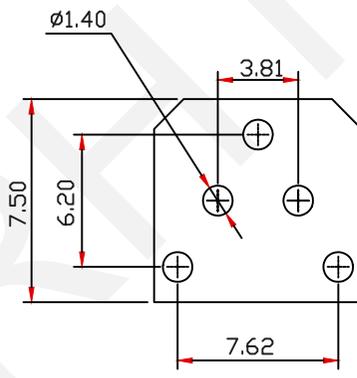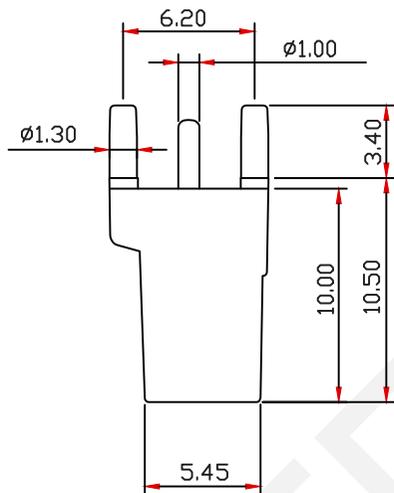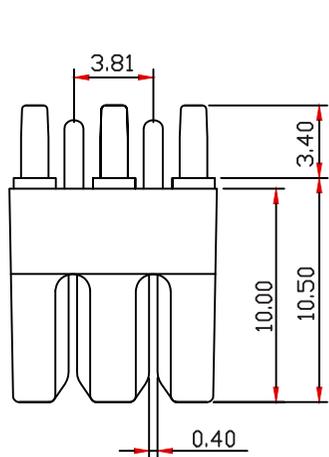

**PCB LAYOUT**  
Tol:±0.05mm

**Material**

Housing: PC

Flammability Rating: UL94V-2

Contacts: Phosphor Bronze, T=0.50mm

Plating: TIN Plating

**Electrical Performance**

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. at 500V DC

Dielectric Strength: 1000V Rms 50Hz, 1 Min.

Durability: 750 cycles Min.

Operation Temperature: -40°C~85°C

**Order Information**

Model Example: RHTLYM-05-XX

Contacts: \_\_\_\_\_  
 02-1 Pair IDC Connector  
 04-2 Pair IDC Connector  
 08-4 Pair IDC Connector

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Krone IDC Block PCB-PLUS

RHTLYM-05-02