


PCB LAYOUT
Tol:±0.05mm



Material & Process

Housing: PC

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze, T=0.80mm

Plating: TIN Plating

Electrical Performance

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. at 500V DC

Dielectric Strength: 1000V Rms 50Hz, 1 Min.

Durability: 750 cycles Min.

Operation Temperature: -40℃ ~ 85℃

Order Information

Model Example: RHTLYM110-02-XP

Contacts: _____

4P-2 Pair IDC Connector

8P-4 Pair IDC Connector

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Krone IDC Block PCB-PLUS

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15





±0.3

±0.5

APPR BY ZHAN



RHTLYM110-02-4P

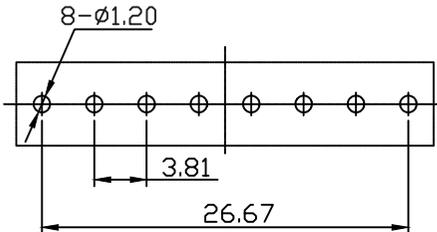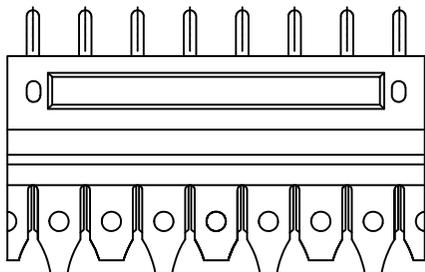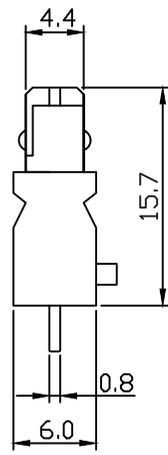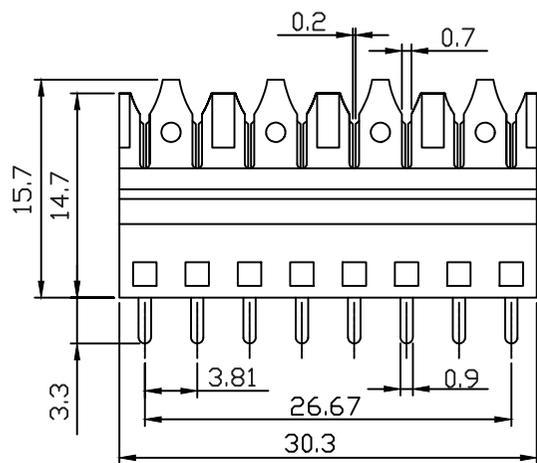

PCB LAYOUT
Tol:±0.05mm

Material & Process

Housing: PC
 Flammability Rating: UL94V-0
 Contacts: Phosphor Bronze, T=0.80mm
 Plating: TIN Plating

Electrical Performance

Voltage Rating: 125VAC
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min. at 500V DC
 Dielectric Strength: 1000V Rms 50Hz, 1 Min.
 Durability: 750 cycles Min.
 Operation Temperature: -40℃ ~ 85℃

Order Information

Model Example: RHTLYM110-02-XP

Contacts: _____
 4P-2 Pair IDC Connector
 8P-4 Pair IDC Connector

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Krone IDC Block PCB-PLUS
 RHTLYM110-02-8P