

PCB LAYOUT  
Tol:±0.05mm

Material  
Housing: PC  
Flammability Rating: UL94V-2  
Contacts: Phosphor Bronze, T=0.50mm  
Plating: TIN Plating

Electrical Performance  
Voltage Rating: 125VAC  
Current Rating: 1.5A  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 500MΩ Min. at 500V DC  
Dielectric Strength: 1000V Rms 50Hz, 1 Min.  
Durability: 750 cycles Min.  
Operation Temperature: -40°C~85°C


Order Information  
Model Example: RHTLYM110-04A-XP





Contacts: \_\_\_\_\_  
4-2 Pair IDC Connector  
8-4 Pair IDC Connector

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
APPR BY ZHAN

Krone IDC Block PCB-PLUS  
THIRD ANGLE PROJECTION  
 RHTLYM110-04A-4P

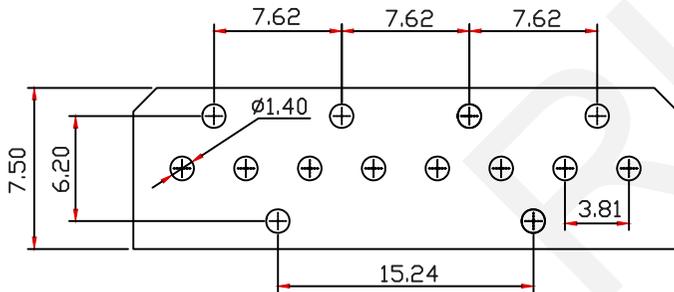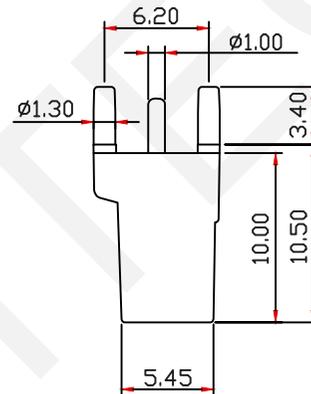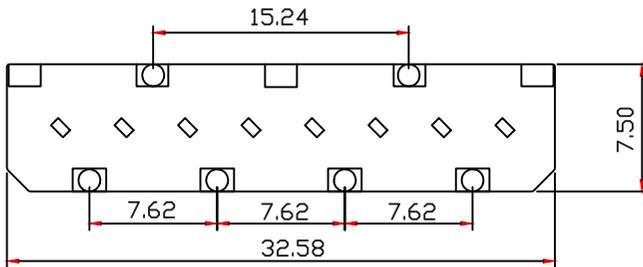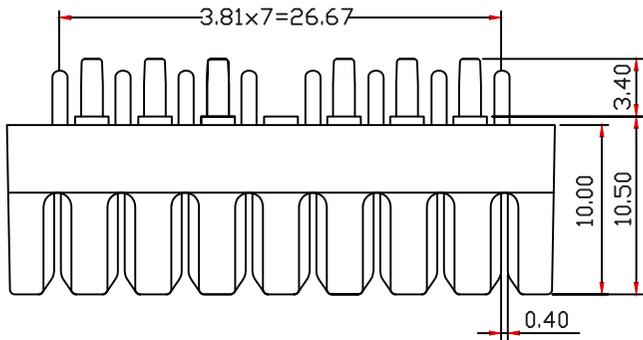

**PCB LAYOUT**  
Tol:±0.05mm

Material  
Housing: PC  
Flammability Rating: UL94V-2  
Contacts: Phosphor Bronze, T=0.50mm  
Plating: TIN Plating

Electrical Performance  
Voltage Rating: 125VAC  
Current Rating: 1.5A  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 500MΩ Min. at 500V DC  
Dielectric Strength: 1000V Rms 50Hz, 1 Min.  
Durability: 750 cycles Min.  
Operation Temperature: -40°C~85°C

Order Information  
Model Example: RHTLYM110-04A-XP

Contacts: \_\_\_\_\_  
4-2 Pair IDC Connector  
8-4 Pair IDC Connector

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Krone IDC Block PCB-PLUS

RHTLYM110-04A-8P