
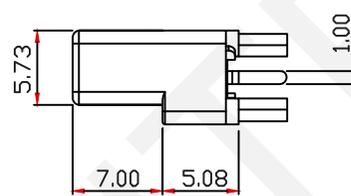


Material
 Housing: PC
 Flammability Rating: UL94V-2
 Contacts: Phosphor Bronze, T=0.50mm
 Plating: TIN Plating

Electrical Performance



Voltage Rating: 125VAC
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min. at 500V DC
 Dielectric Strength: 1000V Rms 50Hz, 1 Min.
 Durability: 750 cycles Min.
 Operation Temperature: -40°C~85°C

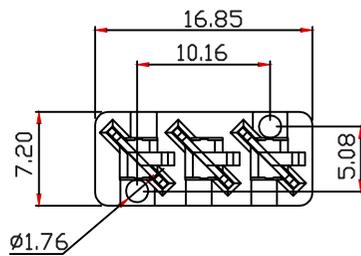

Order Information

Model Example: RHTLYM110-10-03

Contacts: 03-3 Contacts



PCB LAYOUT
 Tol: ±0.05mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD






UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Krone IDC Block PCB-PLUS

THIRD ANGLE PROJECTION



RHTLYM110-10-03

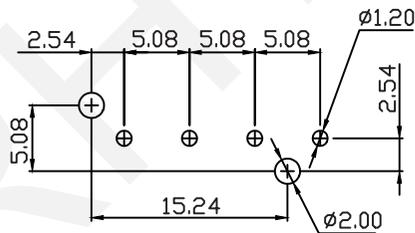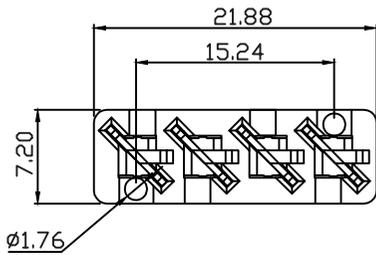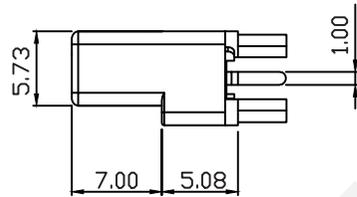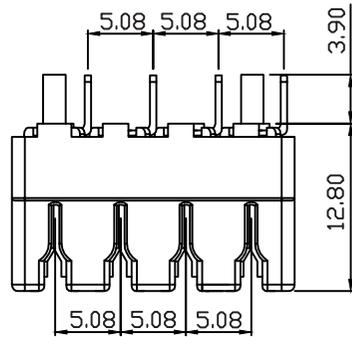

PCB LAYOUT
Tol:±0.05mm

Material
Housing: PC
Flammability Rating: UL94V-2
Contacts: Phosphor Bronze, T=0.50mm
Plating: TIN Plating

Electrical Performance
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min. at 500V DC
Dielectric Strength: 1000V Rms 50Hz, 1 Min.
Durability: 750 cycles Min.
Operation Temperature: -40°C~85°C

Order Information
Model Example: RHTLYM110-10-04

Contacts: 03-3 Contacts

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Krone IDC Block PCB-PLUS

THIRD ANGLE PROJECTION

RHTLYM110-10-04