

Notes:

1. Material:

Housing:PC,UL94V-2

Contact:Phosphor Bronze,Gold Plated

2. Electric



Contact Resistance:2.5mΩ Max

Insulation Resistance:1000MΩ Min



Withstand Voltage Strength:  
DC500V (AC350V) For 1 Minute Without  
Breakdown Or Arcing Phenomenon

Electrical Transmission Performance:

In Accordance With TIA/EIA 568 CAT5E

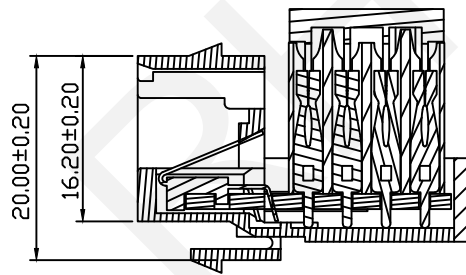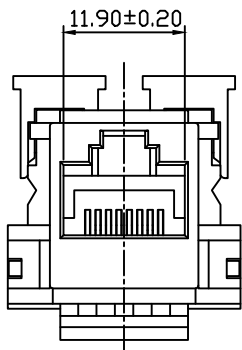

SECTION A-A

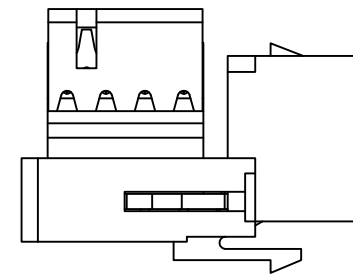

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---	
0~3	3~18	18~50	50~120	DRWN BY PAN	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CAT5E UTP 8P8C Keystone Jacks

THIRD ANGLE PROJECTION



RHTLYK8002-8P8C