


Notes:
 1. Material:
 Housing:PC,UL94V-2
 Contact:Phosphor Bronze,Gold Plated
 2. Electric
 Suitable Wire Diameter:φ0.35~0.65mm
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Voltage Strength:
 DC1000V(AC700V) For 1 Minute Without
 Breakdown Or Arcing Phenomenon
 Electrical Transmission Performance:
 In Accordance With ANSI/TIA 568C CAT5E

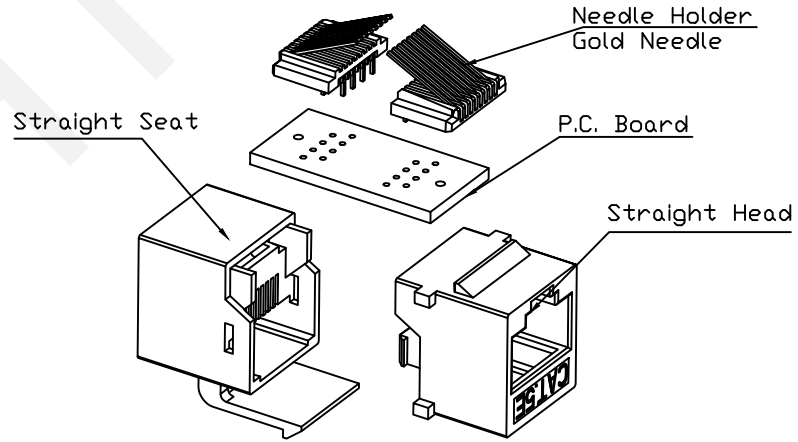

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

CAT5E UTP 8P8C Keystone Jacks
 THIRD ANGLE PROJECTION
 RHTLYK8018-8P8C