

Material

Housing:LCP,UL94V-0,Black

Contactors:Phosphor Bronze,T=0.20mm

Gold Plating On Contact Area

Over Nickel Underplating Over All

Electrical

Rated Voltage:30V

Rated Current:0.5A

Dielectric Withstanding Voltage:300V AC/Minute

Insulation Resistance:100MΩ At 100 VDC For 1 Minute

Contact Resistance:30mΩ Max

Life:100 Cycles Min

Operation Temperature:-40°C~+85°C

Storage Temperature:-40°C~+85°C

In Reflow Peak Soldering Temperature:255°C 10 Seconds

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG


APPR BY ZHAN

20Pin SMD Connector

THIRD ANGLE PROJECTION



RHTLYFR-004

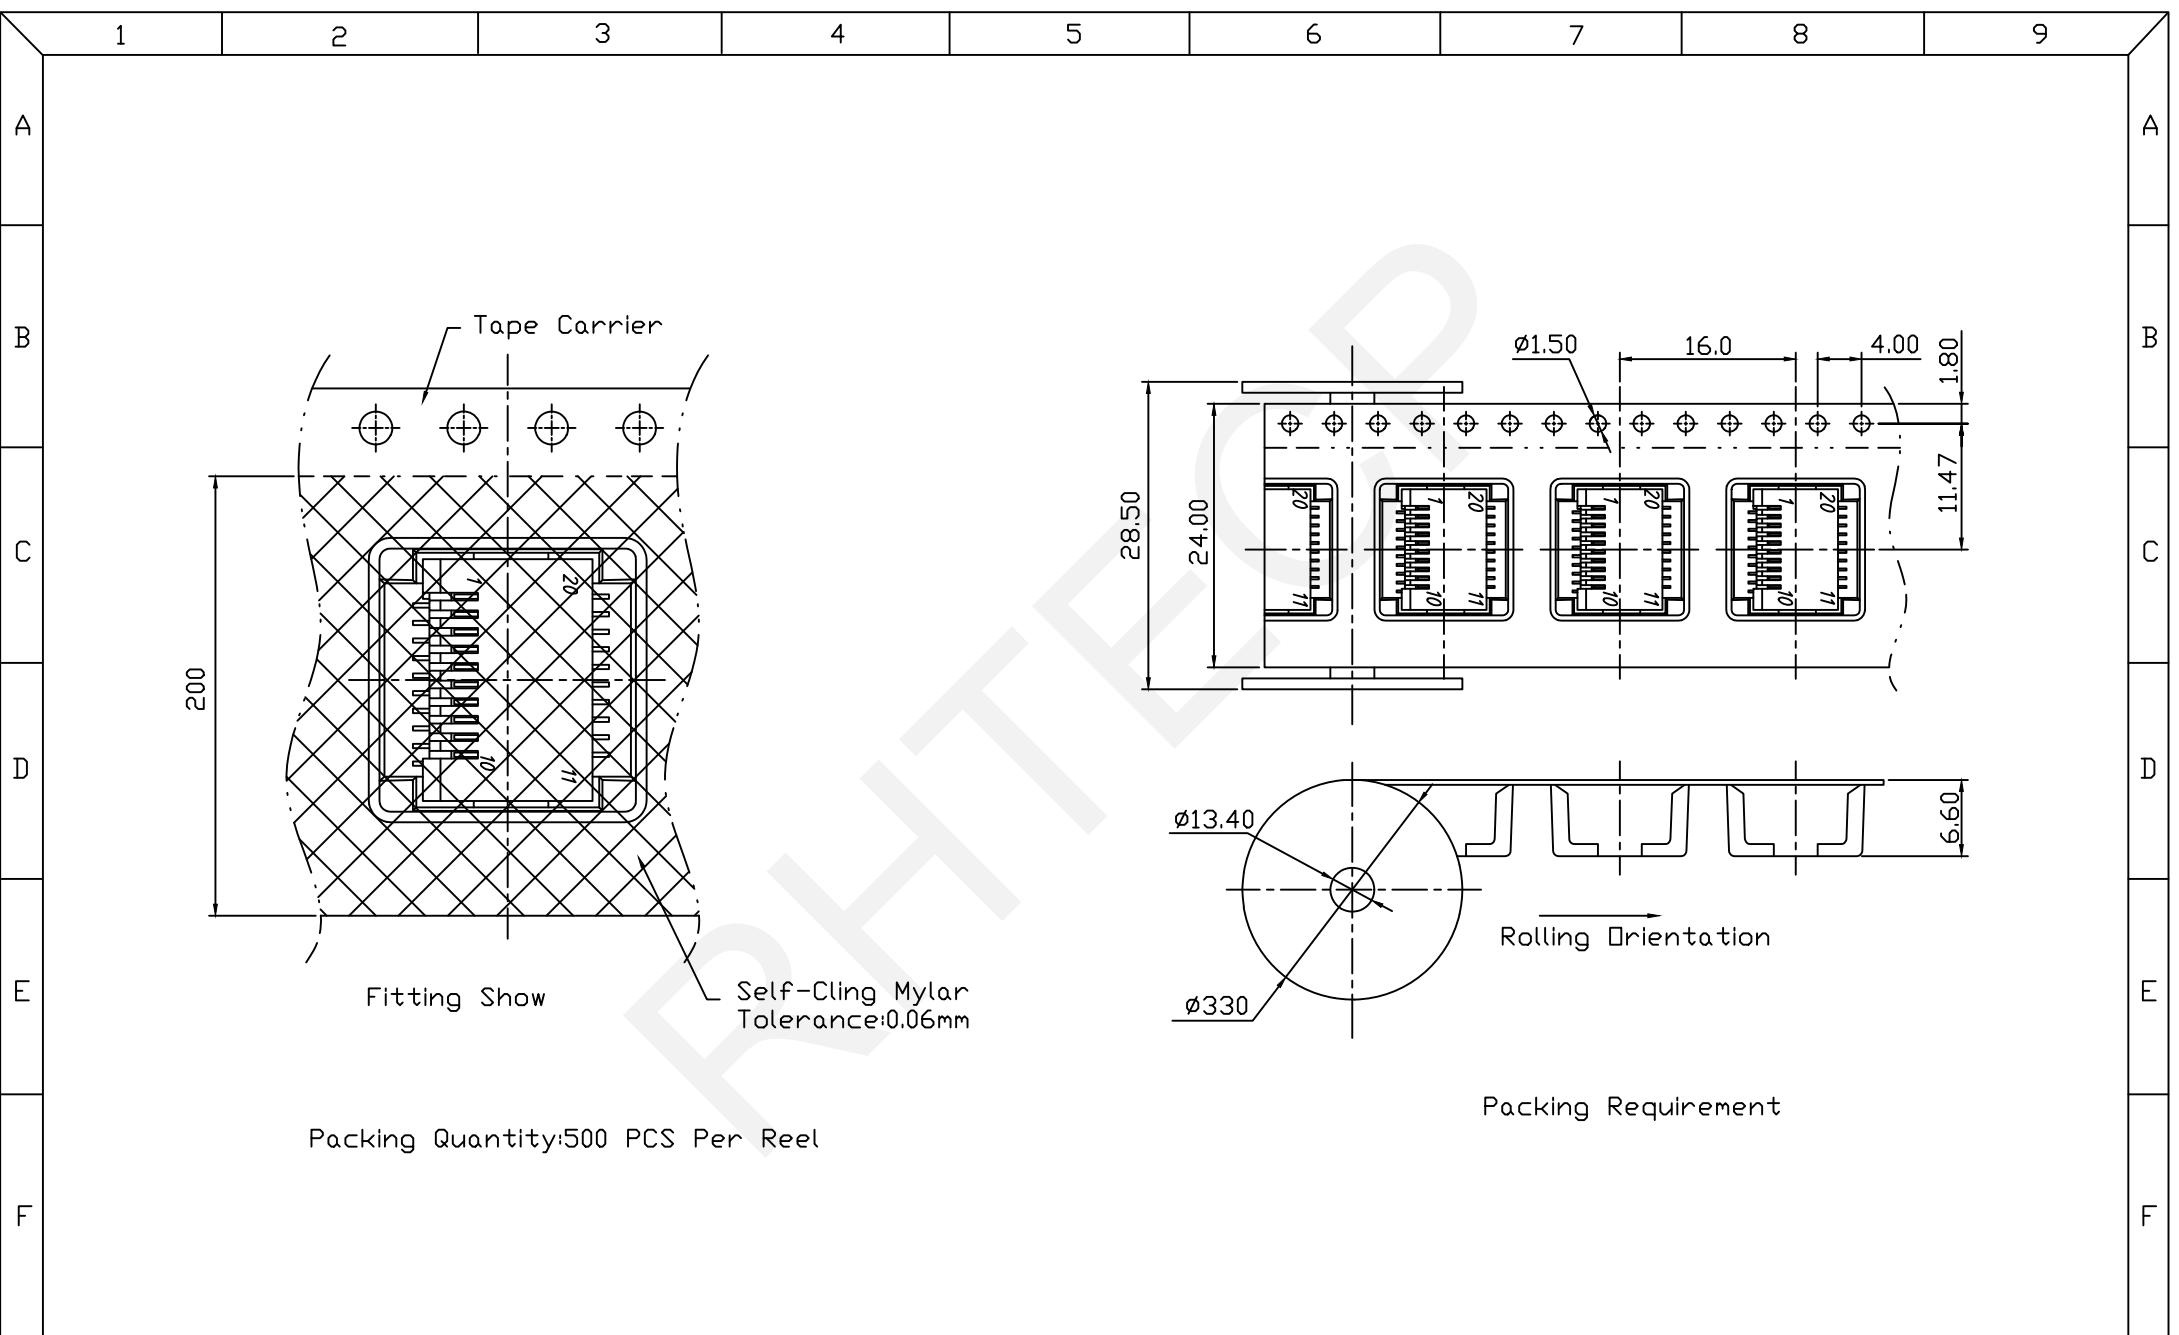

Packing Quantity:500 PCS Per Reel



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

20Pin SMD Connector	
THIRD ANGLE PROJECTION	RHTLYFR-004