
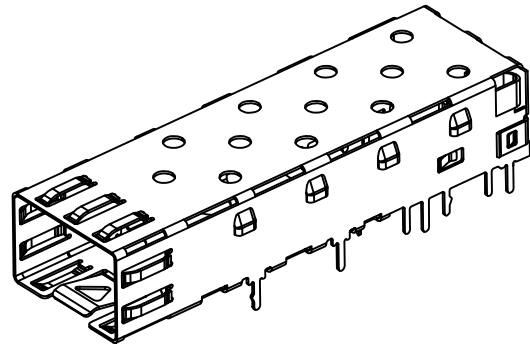
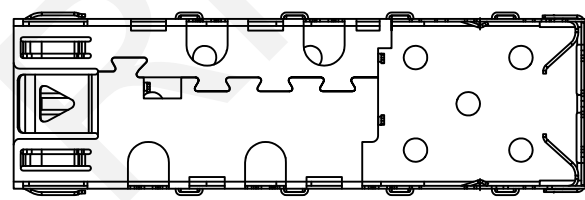

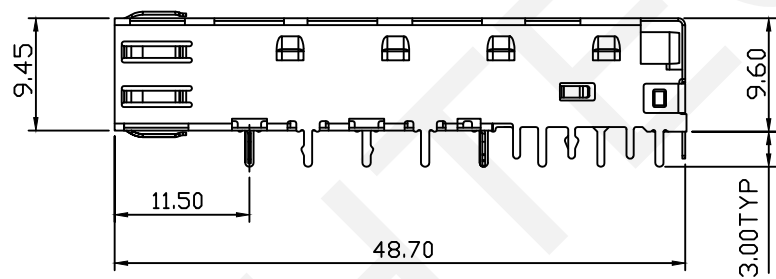



Material: Copper Alloy, T=0.25mm





 NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

RHTLYFP Connector
THIRD ANGLE PROJECTION 
RHTLYFR-017

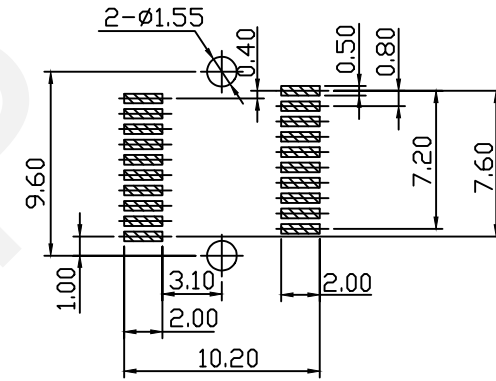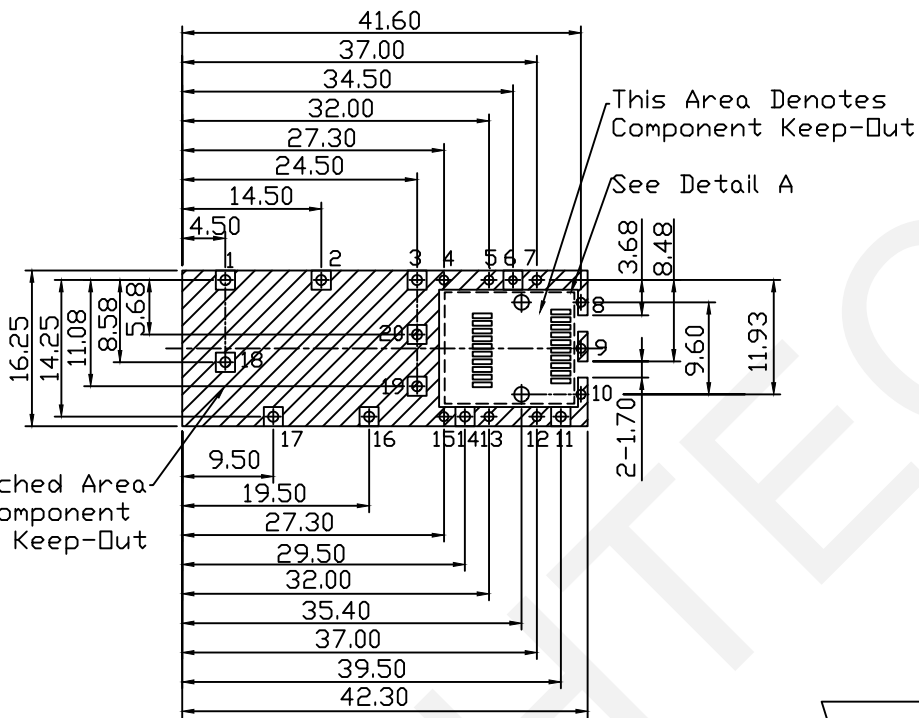

Detail A (2:1)

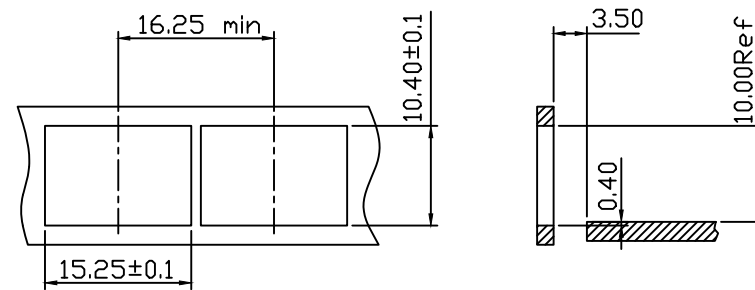

Bezel

Bezel Opening

Recommended Bezel Thickness: 0.80~2.60mm

Below Top Of PCB

Recommended PCB Thickness: 2.36 (Top View)

(Minimum PCB Thickness: 1.57)

(All Tolerances Are ±0.05)

Note:

1,2,3,11,14,16,17,18,19,20# hole=Ø1.05mm,

4,5,7,8,9,10,12,13,15# hole=Ø0.95mm;

6# hole=Ø0.85mm;