
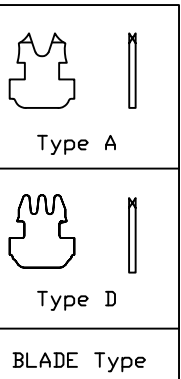



Material:
Housing: Polycarbonate, Transparent
UL94V-0 or UL94V-2
Contacts: Brass, Gold Plating
Electrical:
Rated Current: 125V AC 1.5A@25°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min. 100V DC/Min
Withstand Voltage: 1000VAC/1 Minute
No Breakdown
Mechanical:
Insertion Force: 30N Max
Withdrawal Force: 30N Max.
Durability: 750 Cycles Min.
Operation Temperature: -40°C~+85°C

Order Information
RHTLYJ46-10P10C-xx X X

Point No. _____
Gold Plating _____
01-1u"Gold Plating
02-3u"Gold Plating
03-6u"Gold Plating
15-15u"Gold Plating
30-30u"Gold Plating
50-50u"Gold Plating
BLADE Type: _____
Flammability: _____
Blank-UL94V-2 0-UL94V-0

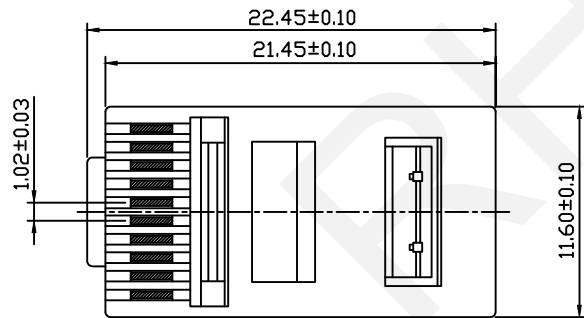

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	UTP CAT3 10P10C RJ12 Modular Plugs	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTLYJ46-10P10C-xxXX



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

1	2	3	4	5	6	7	8	9	
A									A
B									B
C									C
D									D
E									E
F									F
G									G
1	2	3	4	5	6	7	8	9	