

Material:

Housing :PBT+30%GF,UL94V-0,Black.

Plastic bracket :PBT+30%GF,UL94V-0,Black.

Shell: C2680R-H,T=0.20mm,Nickel plated on all area.

Contact terminal:Phosphor bronze C5210R-EH,T=0.35mm,

Gold plated 6u' on mating area.

Solder terminal:Brass,C2680-H,T=0.35mm.Tin plated

80u'Min. on solder area.

Mechanical:

Durability :750 cycles Min.

Mating force :22N Max.

Operating temperature:-40°C~+85°C.


Order Information

RHTLYL051-1X1-G

Part Number

Ports :1x1 Ports

LED Style:G/Yellow/Green

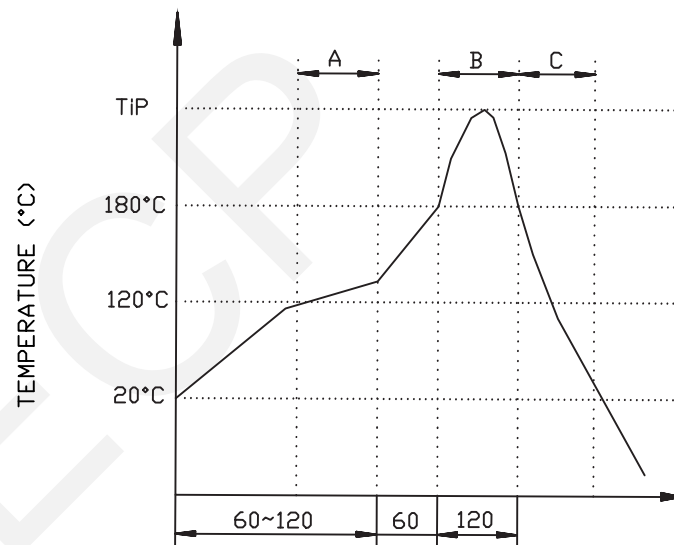

A .Preheating B.Soldering C.Gradual Cooling

Tip temperature:260±5°C.

Tip temperature time:5Sec Max.

Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

After the wave solder,the plastic column of product under the pcb will have a slight plastic melting situation.


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

100 Base 1x1 Tab-Down RJ45

THIRD ANGLE PROJECTION



RHTLYL051-1X1-G