
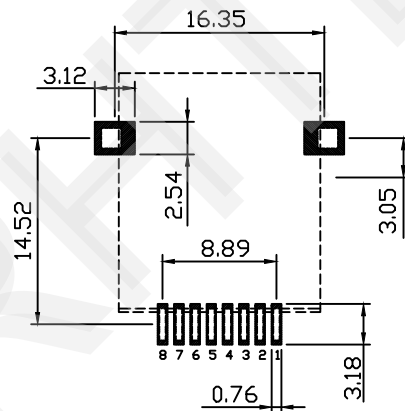


PCB LAYOUT/TOP VIEW

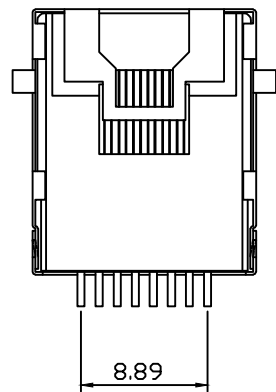

Electrical:

- 1.Voltage Rating: 125VAC
- 2.Current Rating: 1.5A
- 3.Contact Resistance: 40mΩ Max.
- 4.Insulation Resistance: 1000MΩ Min.@500VDC
- 5.Withstanding Resistance: 1000VAC RMS, 50Hz 1minute

Materials:

- 1.Housing: High Temp. Thermoplastic Flammability UL94V-0
- 2.Contact: Phosphor Bronze
- 3.Plating: Gold Plating over nickel in contact, Tin Plating over nickel in solder area
- 4.Shield: 0.23 Thickness Brass With Nickel Plated

Mechanical:

- 1.Durability: 750 cycles Min.
- 2.PCB Retention pre-solder: 1 LB Min.

Environmental:

- 1.Storage:-40°C~+85°C
- 2.Operation:-40°C~+75°C

Order Information:

RHTLYMT10-8P8C-W-XX-P

Point No: 8P8C

Shield Code:W-Without Shield

Plating:

- 01: 1u" Gold 02: 3u" Gold
- 03: 6u" Gold 04: 15u" Gold
- 05: 30u" Gold

Packing: R-Reel P-Blister Tray

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

RJ45-8P8C SMD Jack Vertical,With Shilded

THIRD ANGLE PROJECTION



RHTLYMT10-8P8C-W-XX-P