

Specification:

Frequency: 824~960/1710~2170MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max Power : 10W

Connector : RP SMA-J

Cable: RG174, Black


Length: 3000mm

Mounting Method: Screw

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

Order Information

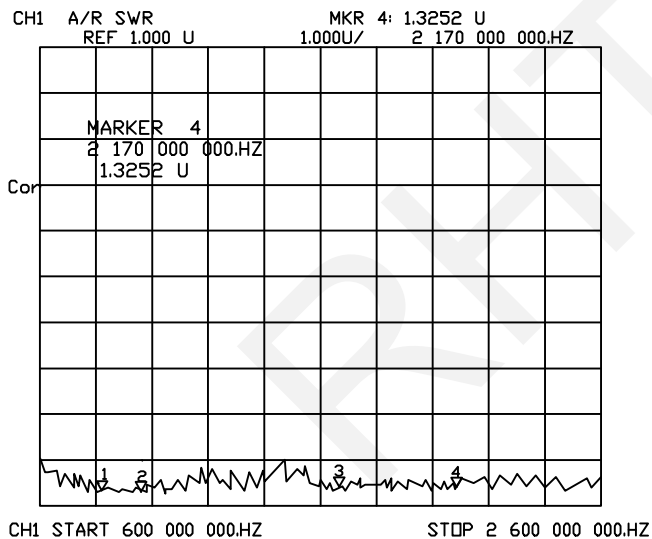

RHTAYG 30 010 3000

Antenna Frequency  
824~960/1710~2170MHz

Con.Code: 010: Standard

SMA-J Connector


3000: Cable Length

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

3G Antenna With Magnet

THIRD ANGLE PROJECTION



RHTAYG30010XXXX