


CH1 A/R SWR MKR 4: 1.3252 U
 REF 1.000 U 1.000U/ 2 170 000 000.HZ

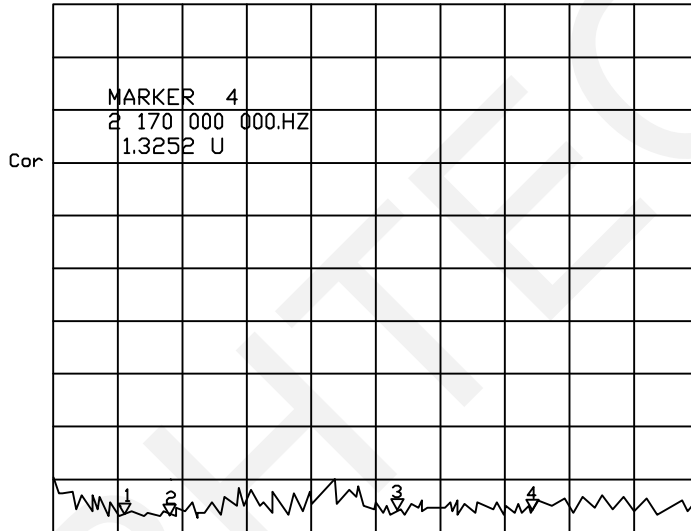

Specification:

Frequency:824~960/1710~2170MHz

Gain:3dB

Vswr:1.5 Max.

Impedance:50 Ω

Polarization:Vertical

Radiation:OMNIDIRECTIONAL

Connector:SMA-J

Lightning protection:DC Grounding

Operating Temperature:-30°C to+70°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN

0~3 3~18 18~50 50~120 CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

3G Antenna Bending

THIRD ANGLE PROJECTION



RHTAYGB010195