


CH1 A/R SWR MKR 4: 1.3252 U
 REF 1.000 U 1.000U/ 2 170 000 000.HZ

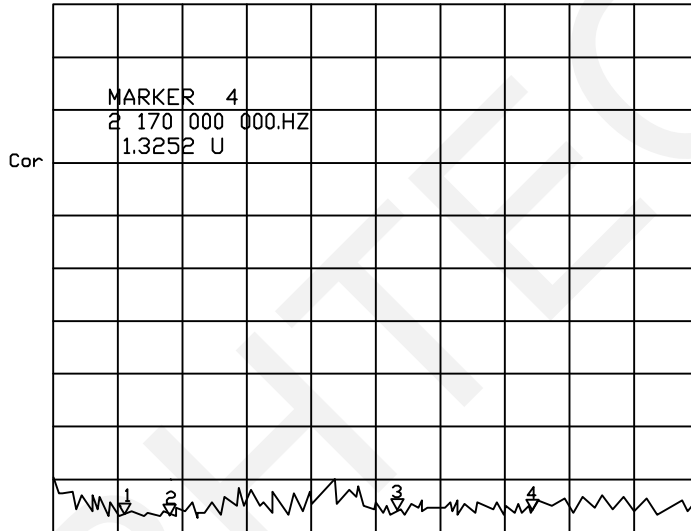

CH1 START 600 000 000.HZ STOP 2 600 000 000.HZ

Specification:

Frequency: 824~960/1710~2170MHz

Gain: 3dBi

Vswr: 1.5 Max.

Impedance: 50 Ω

Polarization: Vertical

Radiation: OMNIDIRECTIONAL

Connector: RP SMA-J

Lightning protection: DC Grounding

Operating Temperature: -30°C to +70°C

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN

0~3 3~18 18~50 50~120 CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

3G Antenna Bending

THIRD ANGLE PROJECTION



RHTAYGB011195