




Electrical Specification:  
 Rating: 0.5A 30V DC  
 Contact Resistance: 30mΩ max  
 Insulation Resistance: 100mΩ min at 500V DC  
 Dielectric Strength(V):AC 500V(50Hz) for 1 min  
 Life: 5000 Cycles  
 Temperature: -30°C~+70°C  
 Insertion and Extraction Force: 3-20N  
 Material:

Housing Material:PA66  
 Center Pin Material:  
 Terminal1:Copper Alloy  
 Terminal2:Copper Alloy  
 Terminal3:Copper Alloy  
 Terminal10:Brass




Ø2.1 MATE PLUG



ORDER INFORMATION

RHTAYSJ2.1-001A-1

Ø2.1 Dip Stereo Jack Type  
 Schematic See Annex

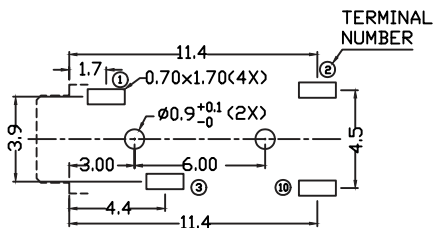

PCB LAYDUT  
 <BOTTOM VIEW>


MODEL NO.	RHTAYSJ2.1-001A	RHTAYSJ2.1-001A-1	RHTAYSJ2.1-001A-2
SCHEMATIC			

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.1mm Dip Stereo Jack Type

THIRD ANGLE PROJECTION



RHTAYSJ2.1-001A